

# [POWER COMMANDER V]

**2008-2015 BMW F800 GS**

**Installation Instructions**



## **PARTS LIST**

- 1 Power Commander
- 1 USB Cable
- 1 Installation Guide
- 2 Power Commander Decals
- 2 Dynojet Decals
- 2 Velcro strips
- 1 Alcohol swab

**THE IGNITION MUST BE TURNED  
OFF BEFORE INSTALLATION!**


THE LATEST POWER COMMANDER  
SOFTWARE AND MAP FILES CAN BE  
DOWNLOADED FROM OUR WEB SITE AT:  
[www.powercommander.com](http://www.powercommander.com)

**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

**Dynojet**

2191 Mendenhall Drive North Las Vegas, NV 89081 (800) 992-4993 [www.powercommander.com](http://www.powercommander.com)

# POWER COMMANDER V INPUT ACCESSORY GUIDE

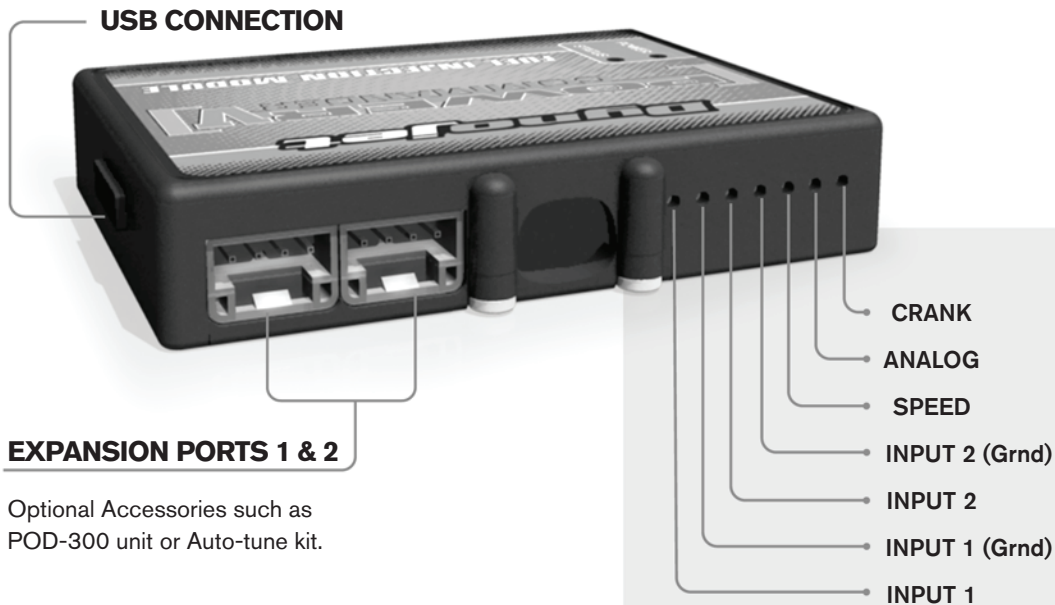

## Wire connections:

To input wires into the PCV first remove the rubber plug on the backside of the unit and loosen the screw for the corresponding input. Using a 22-24 gauge wire strip about 10mm from its end. Push the wire into the hole of the PCV until it stops and then tighten the screw. Make sure to reinstall the rubber plug.

NOTE: If you tin the wires with solder it will make inserting them easier.



## ACCESSORY INPUTS

### Map -

(Input 1 or 2) The PCV has the ability to hold 2 different base maps. You can switch on the fly between these two base maps when you hook up a switch to the MAP inputs. You can use any open/close type switch. The polarity of the wires is not important. When using the Autotune kit one position will hold a base map and the other position will let you activate the learning mode. When the switch is "CLOSED" Autotune will be activated.

### Shifter-

(Input 1 or 2) These inputs are for use with the Dynojet quickshifter. Insert the wires from the Dynojet quickshifter into the SHIFTER inputs. The polarity of the wires is not important.

### Speed-

If your application has a speed sensor then you can tap into the signal side of the sensor and run a wire into this input. This will allow you to calculate gear position in the Control Center Software. Once gear position is setup you can alter your map based on gear position and setup gear dependent kill times when using a quickshifter.

### Analog-

This input is for a 0-5v signal such as engine temp, boost, etc. Once this input is established you can alter your fuel curve based on this input in the control center software.


### Crank-

Do **NOT** connect anything to this port unless instructed to do so by Dynojet. It is used to transfer crank trigger data from one module to another.


**DO NOT TURN ON THE IGNITION WHILE ANY CONNECTIONS ARE UNPLUGGED.**




- 1 Remove the seat.
- 2 Remove the left and right hand fairings and the middle cover (Fig. A)

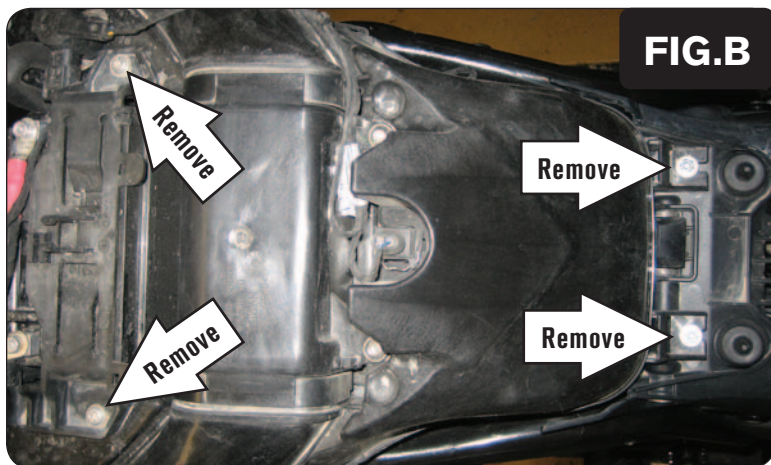

- 3 Remove the battery.
- 4 Remove the airbox by removing the bolts at the front (under battery) and rear of the airbox (Fig. B).

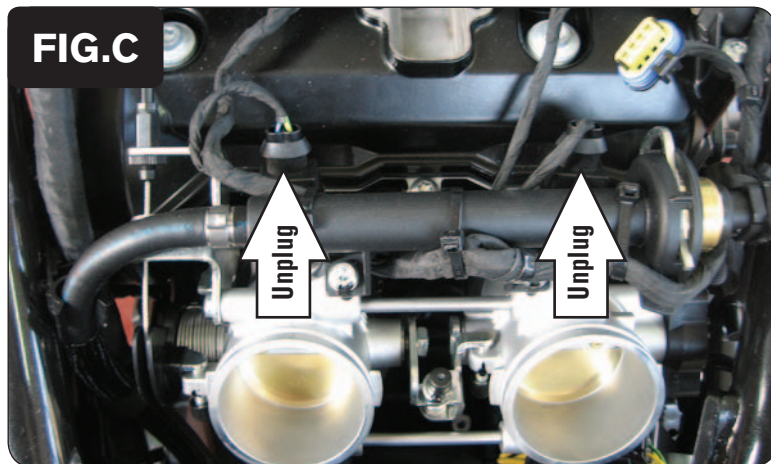


- 5 Lay the PCV near the fuel pump (under seat) temporarily.
- 6 Route the PCV harness along the right hand side of the bike and go towards the throttle bodies.
- 7 Unplug the stock wiring harness from both of the fuel injectors (Fig. C).

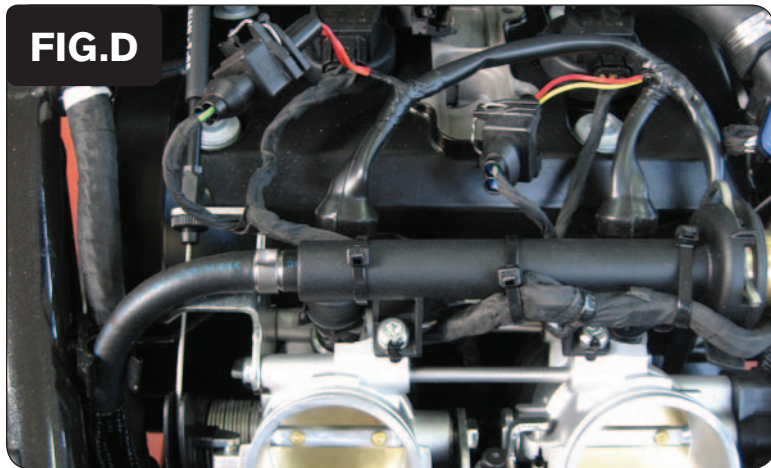

- 8 Plug the PCV wiring harness in-line of the stock wiring harness and both of the fuel injectors (Fig. D).

*The pair of PCV leads with ORANGE colored wires go in-line of the #1 (left) cylinder.*


*The pair of PCV leads with YELLOW colored wires go in-line of the #2 (right) cylinder.*

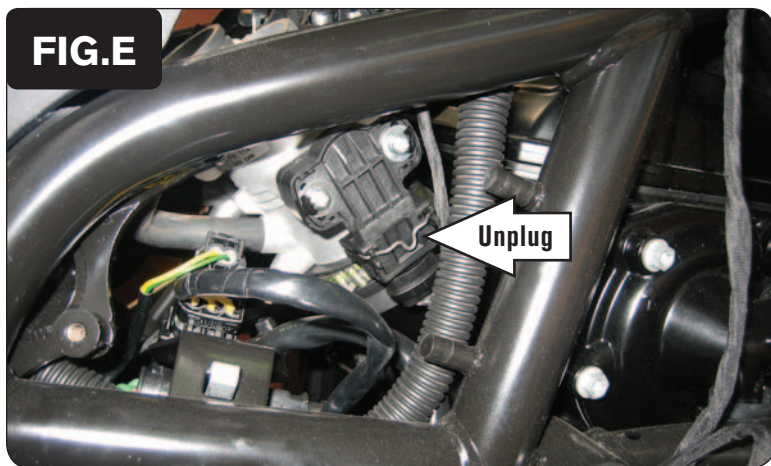


- 9 Remove the small black plastic cover on the right hand of the bike.
- 10 Locate the Throttle Position Sensor and unplug the wiring harness from the sensor (Fig. E).




- 11 Plug the PCV wiring harness in-line of the stock wiring harness and the Throttle Position Sensor (Fig. F).

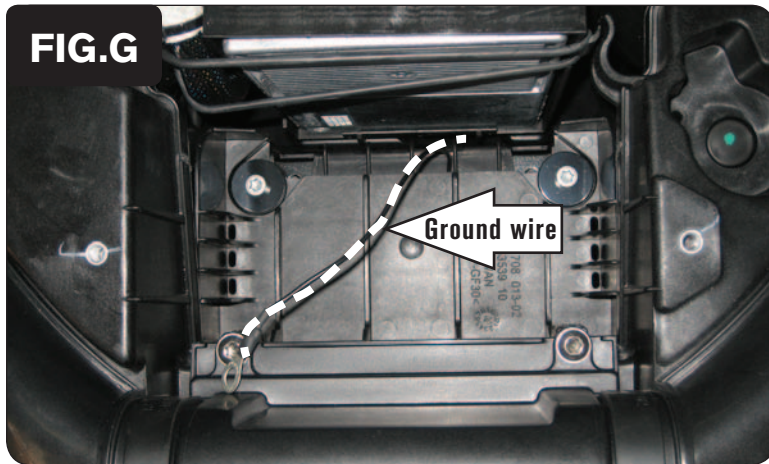


- 12 Reinstall the airbox while routing the ground wire of the PCV through the battery location (Fig. G).

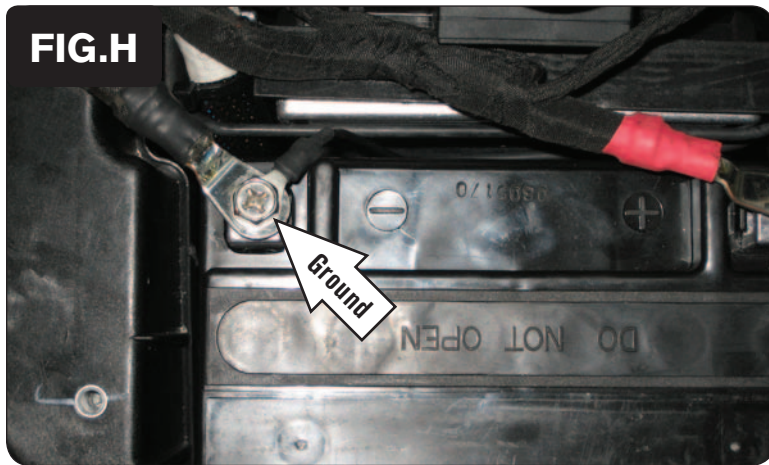

- 13 Reinstall the battery. Connect the ground wire from the PCV with the small ring lug to the negative (-) terminal of the bike's battery (Fig. H).

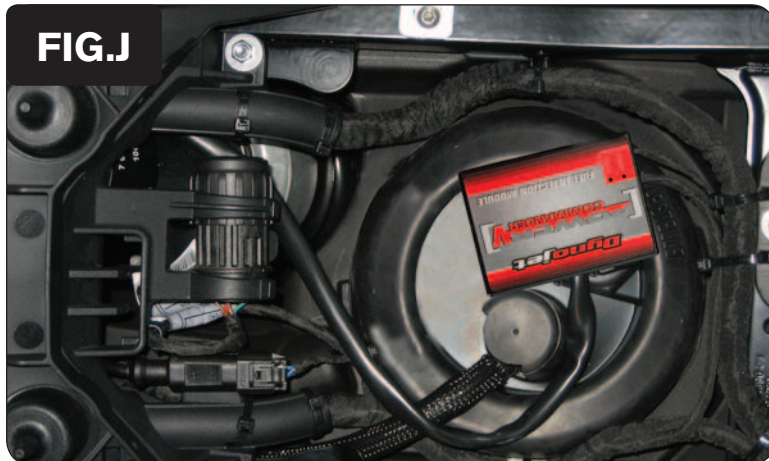

- 14 Secure the PCV in place using the supplied Velcro (Fig. J).  
*Clean both surfaces with the supplied alcohol swab prior to applying the Velcro.*

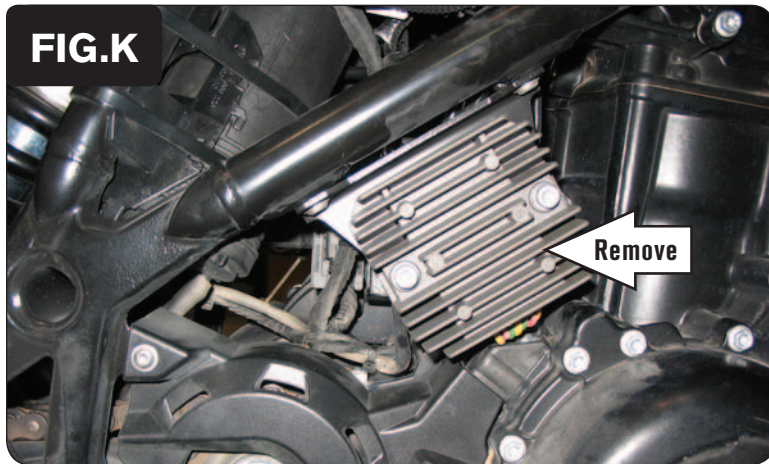

- 15 Remove the regulator/rectifier to access the O2 sensor connection behind it (Fig. K).



- 16 Unplug the O2 sensor from the main wiring harness (Fig. L).  
*The stock O2 sensor will no longer be connected to anything. It can be removed from the exhaust if desired and if you have a way to plug the hole in the exhaust.*
- 17 Reinstall the regulator/rectifier, the bodywork, and the seat.