

[POWER COMMANDER V]

FUEL AND IGNITION

2015 Polaris Sportsman ETX

Installation Instructions



PARTS LIST

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 2 Power Commander Decals
- 2 Dynojet Decals
- 2 Velcro strips
- 1 Alcohol swab

**THE IGNITION MUST BE TURNED
OFF BEFORE INSTALLATION!**


YOU CAN ALSO DOWNLOAD THE
POWER COMMANDER SOFTWARE AND
LATEST MAPS FROM OUR WEB SITE AT:
www.powercommander.com

PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION

Dynojet

2191 Mendenhall Drive North Las Vegas, NV 89081 (800) 992-4993 www.powercommander.com

POWER COMMANDER V INPUT ACCESSORY GUIDE

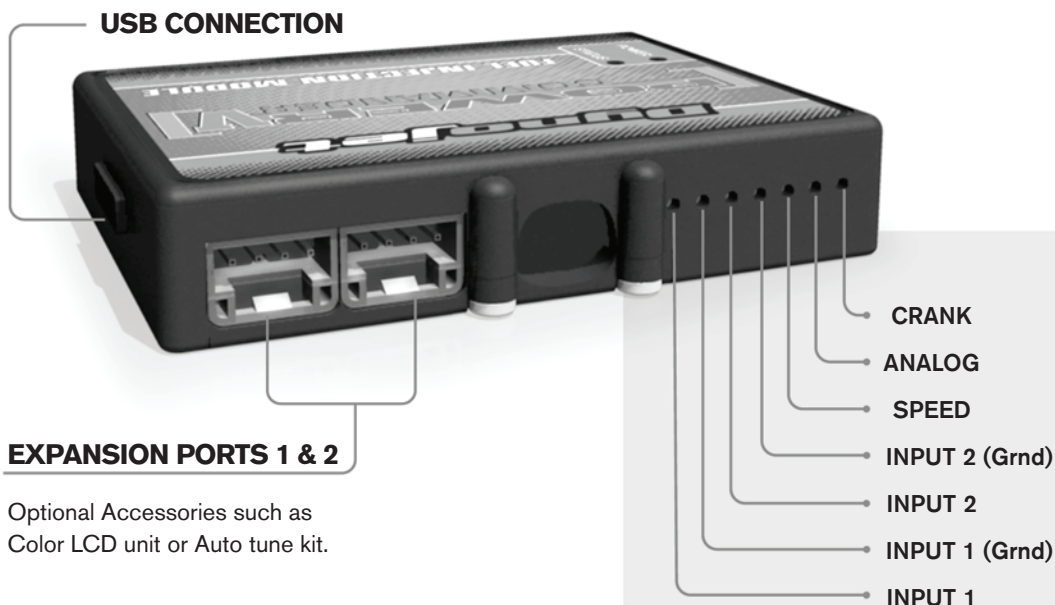


Optional Accessories such as
Color LCD unit or Auto tune kit.

Wire connections:

To input wires into the PCV first remove the rubber plug on the backside of the unit and loosen the screw for the corresponding input. Using a 22-24 gauge wire strip about 10mm from its end. Push the wire into the hole of the PCV until it stops and then tighten the screw. Make sure to reinstall the rubber plug.

NOTE: If you tin the wires with solder it will make inserting them easier.

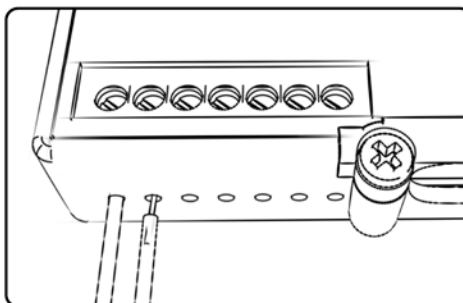

ACCESSORY INPUTS

Map -

(Input 1 or 2) The PCV has the ability to hold 2 different base maps. You can switch on the fly between these two base maps when you hook up a switch to the MAP inputs. You can use any open/close type switch. The polarity of the wires is not important. When using the Autotune kit one position will hold a base map and the other position will let you activate the learning mode. When the switch is "CLOSED" Autotune will be activated. (Set to Switch Input #1 by default.)

Shifter-

(Input 1 or 2) These inputs are for use with the Dynojet quickshifter. Insert the wires from the Dynojet quickshifter into the SHIFTER inputs. The polarity of the wires is not important. (Set to Switch Input #2 by default.)

Speed-

If your application has a speed sensor then you can tap into the signal side of the sensor and run a wire into this input. This will allow you to calculate gear position in the Control Center Software. Once gear position is setup you can alter your map based on gear position and setup gear dependent kill times when using a quickshifter.

Analog-

This input is for a 0-5v signal such as engine temp, boost, etc. Once this input is established you can alter your fuel curve based on this input in the control center software.


Crank-

Do **NOT** connect anything to this port unless instructed to do so by Dynojet. It is used to transfer crank trigger data from one module to another.




- 1 Remove the seat and both side covers.
- 2 Remove the airbox by removing the 2 bolts on either side and loosen the clamp (Fig. A).


This makes access to the crank position sensor much easier.

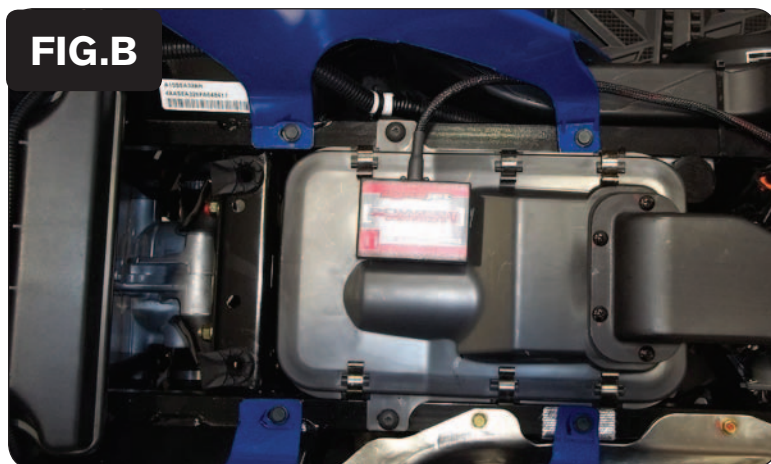

- 3 Install the PCV on top of the stock battery using the supplied velcro (Fig. A).
Make sure that the unit is installed to the rear, left corner of the battery and to clean both surfaces before attaching with the alcohol swab.
- 4 Attach the ground wire of the PCV to the negative side of the battery.
- 5 Route the PCV harness to the left side of the Quad following the upper frame tube.

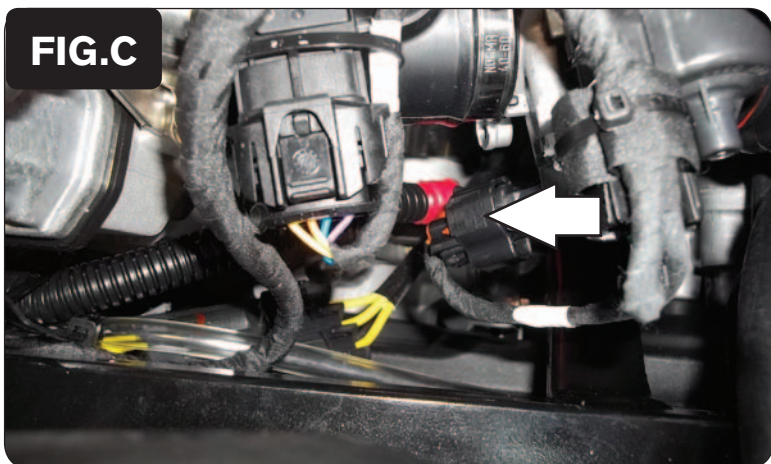


- 6 Unplug the stock wiring harness from the Throttle Position Sensor.
This connection is a 3 pin connector. One side is GREY and the other is WHITE and it is located on the front side of the throttle bodies.(Fig. C).

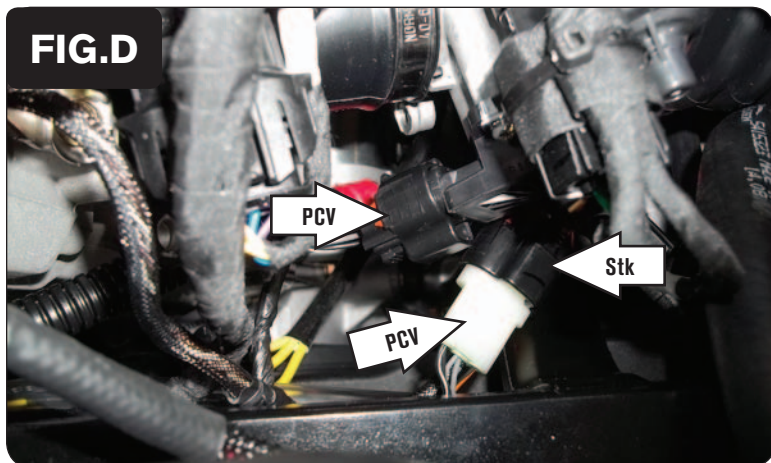

- 7 Plug the PCV harness in-line of the stock TPS and wiring harness (Fig. D).




- 8 Unplug the stock wiring harness from the injector (Fig. E).

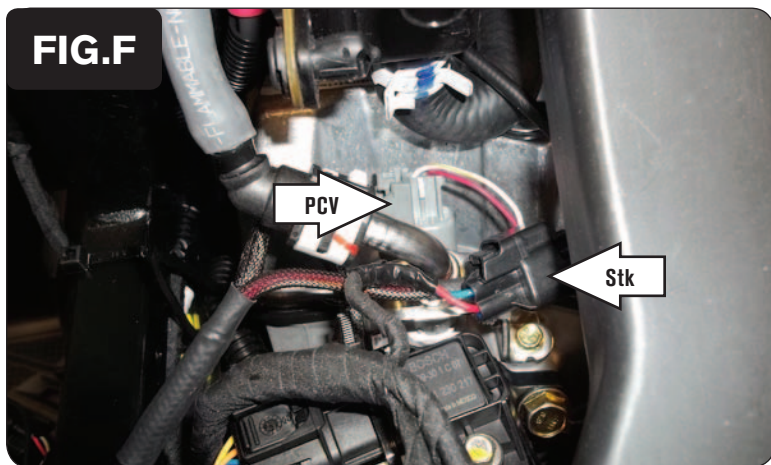


- 9 Plug the PCV in-line of the stock wiring harness and injector (Fig. F).

FIG.G

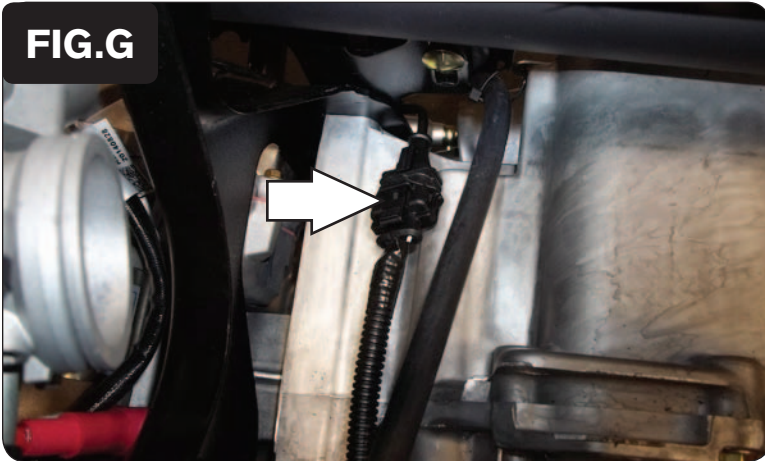


- 10 Locate the stock Crank Position Sensor connector and unplug it (Fig. G).
This is a BLACK 3 pin connector located underneath the airbox.

FIG.H

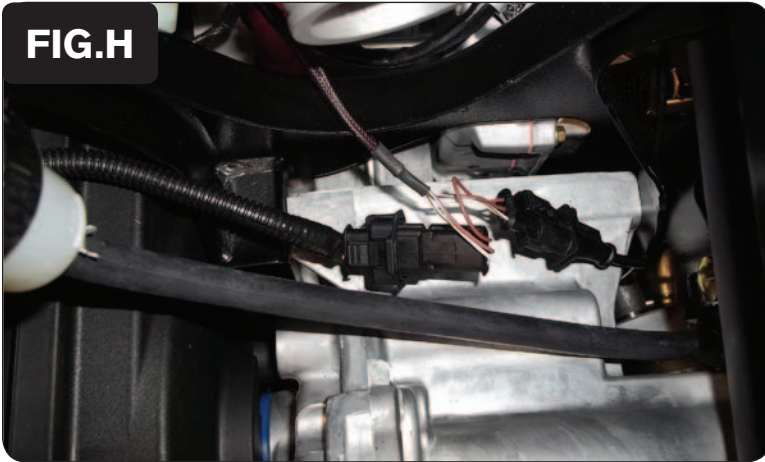


- 11 Plug the PCV harness in-line of the stock CPS and wiring harness (Fig. H).


FIG.J

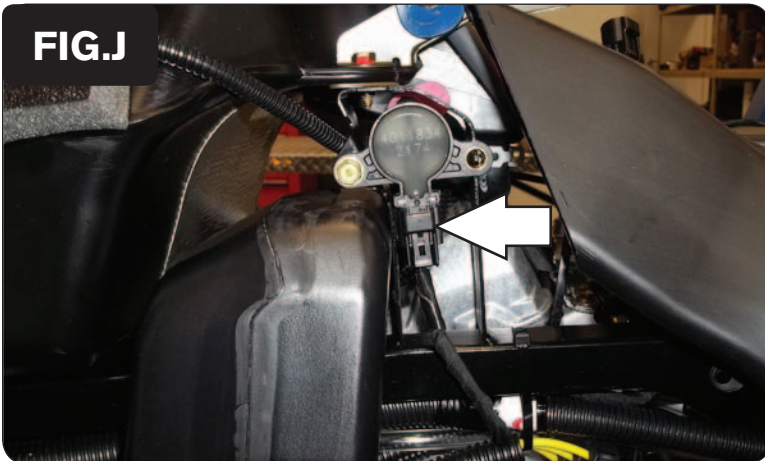

- 12 Locate and unplug the stock wiring harness from the Ignition coil (Fig. J).
The coil is located on the left side of the engine.

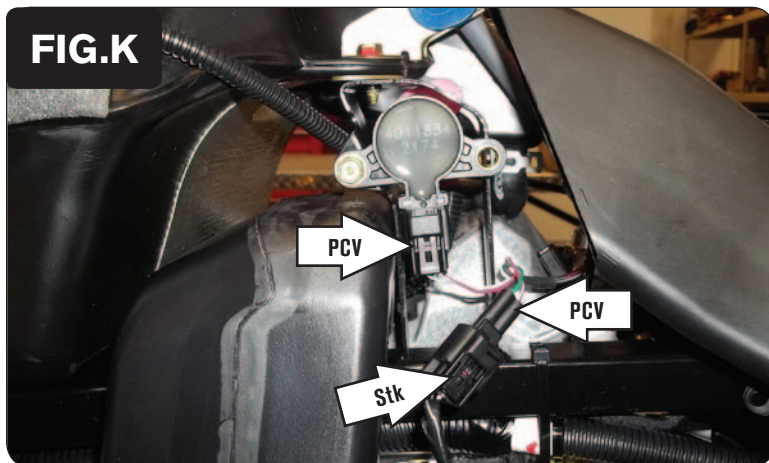

- 13 Plug the PCV harness in-line of the stock coil and wiring harness (Fig. K).

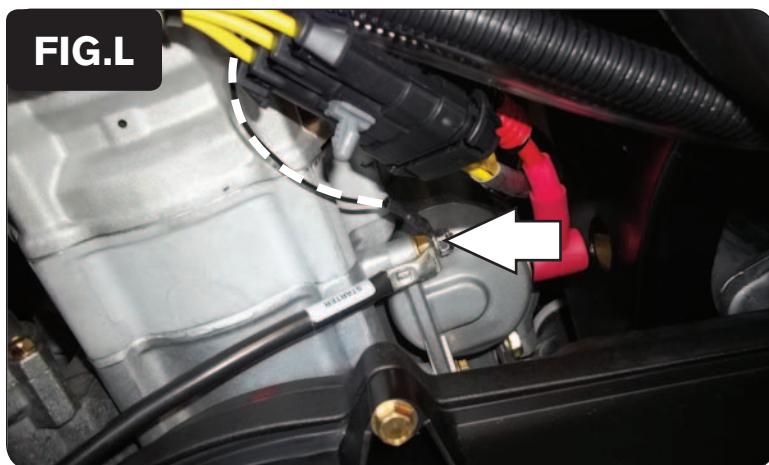

- 14 Attach the ground wire of the PCV to the common ground location on the left side of the engine near the starter (Fig. L).
- 15 Reinstall the airbox, side panels and seat.