

# **[POWER] COMMANDER III**

CERTIFIED **USB**

## **2004 Kawasaki KLV1000** Installation Instructions

### **Parts List**

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 1 Power Adapter
- 2 Power Commander Decals
- 2 Dynojet Decals
- 1 Velcro® Strip
- 1 Alcohol Swab

Button Adjustment Display



Faceplate Buttons

**The ignition MUST be turned OFF before installation!**

You can also download the Power Commander software and latest maps from our web site at:

[www.powercommander.com](http://www.powercommander.com)


Expansion Port

USB Port




**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

Fig. A

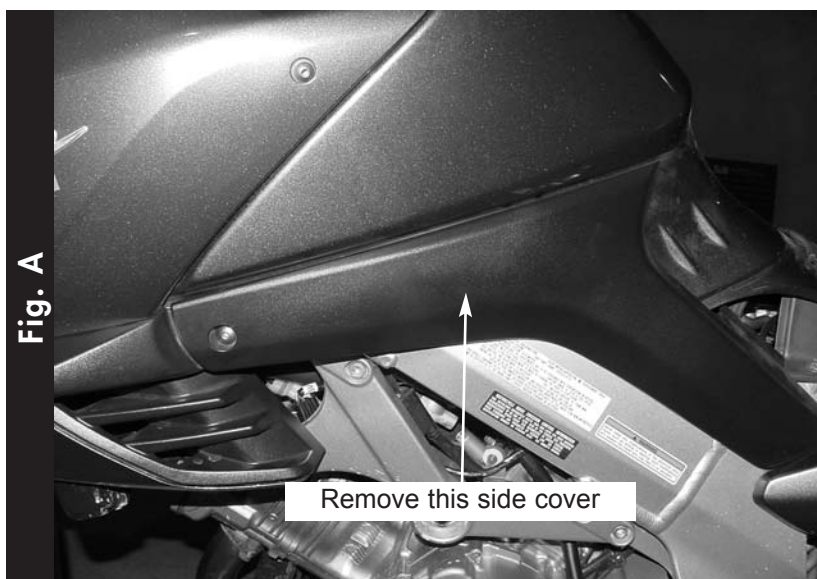


- 1 Remove the main seat and the passenger seat.
- 2 Remove the black, left hand, side fairing (Fig. A)

Fig. B

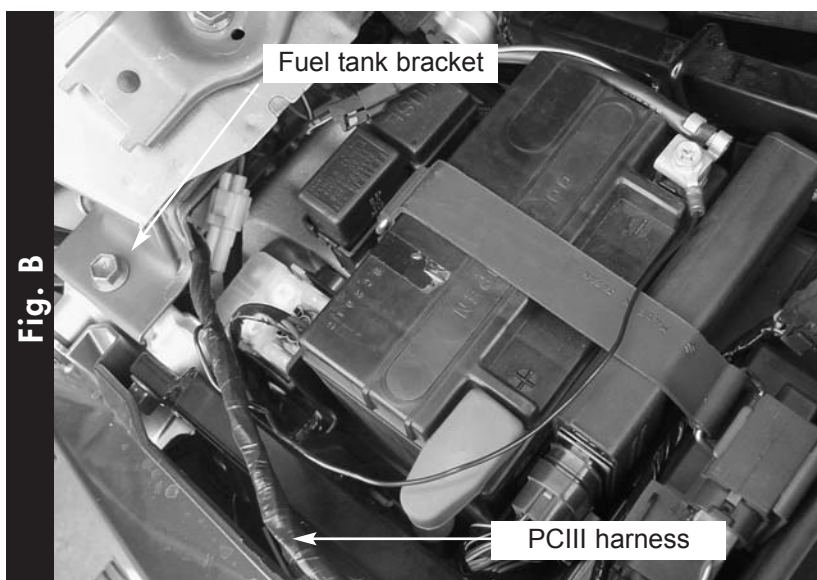


- 3 Route the wires from the PCIII under the fuel tank bracket and go towards the front of the bike on the left hand side of the engine (Fig. B)


Fig. C

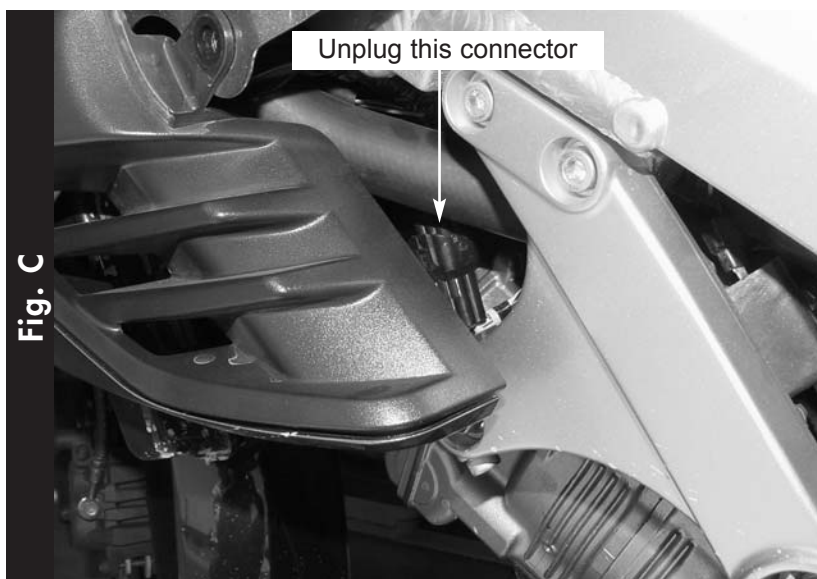

- 4 Unplug the connector from the throttle bodies (Fig. C). This connector is located on the L.H side of the engine behind the frame rail. It is black in color.

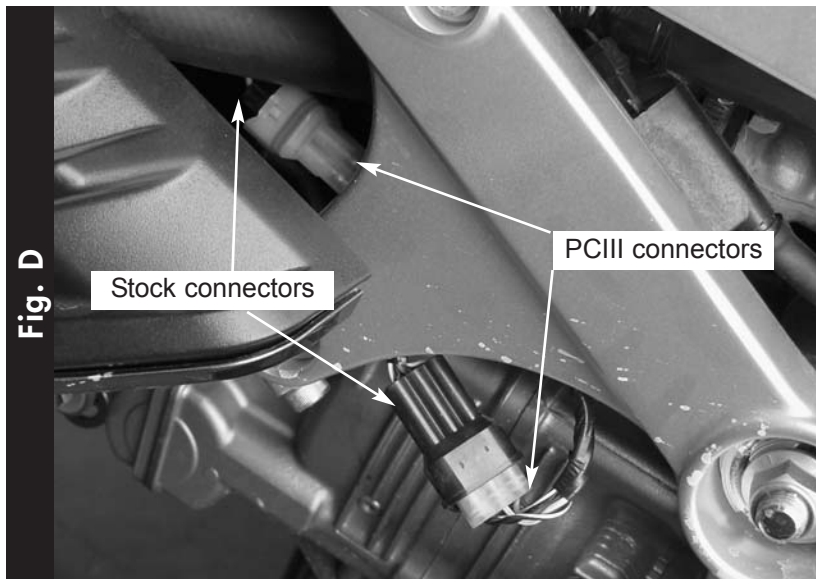

- 5 Plug the PCIII in-line of these connectors (Fig. D).

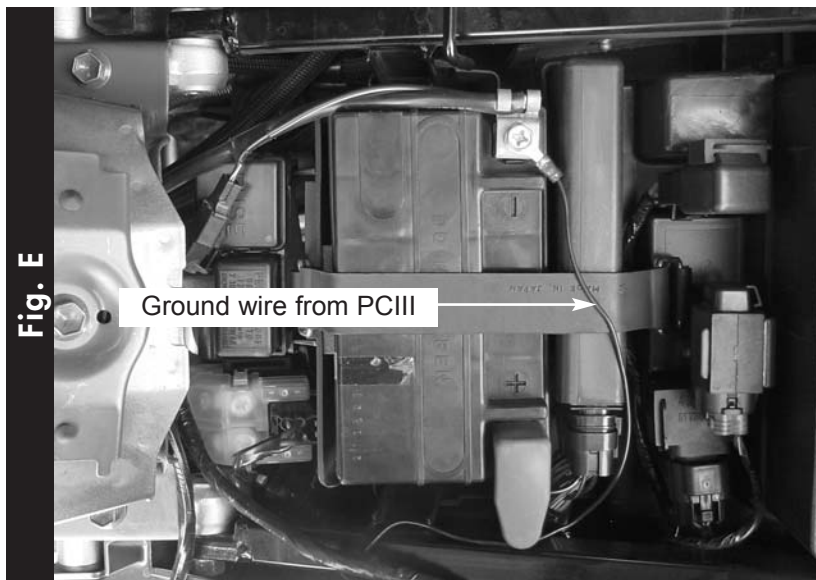

- 6 Attach the ground wire from the PCIII to the negative side of the battery (Fig. E).



- 7 Install the PCIII in the tail section using the supplied velcro. Make sure to clean both surfaces before attaching unit (Fig. F).