

# [POWER] [COMMANDER III]

CERTIFIED **USB**

## 1997-2003 Ducati 748 Installation Instructions

### Parts List

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 1 Power Adapter
- 2 Power Commander Decals
- 2 Dynojet Decals
- 1 Velcro® Strip
- 1 Alcohol Swab

Button Adjustment Display



Faceplate Buttons

Expansion Port

USB Port




**The ignition MUST be turned OFF before installation!**


You can also download the Power Commander software and latest maps from our web site at:

[www.powercommander.com](http://www.powercommander.com)

**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

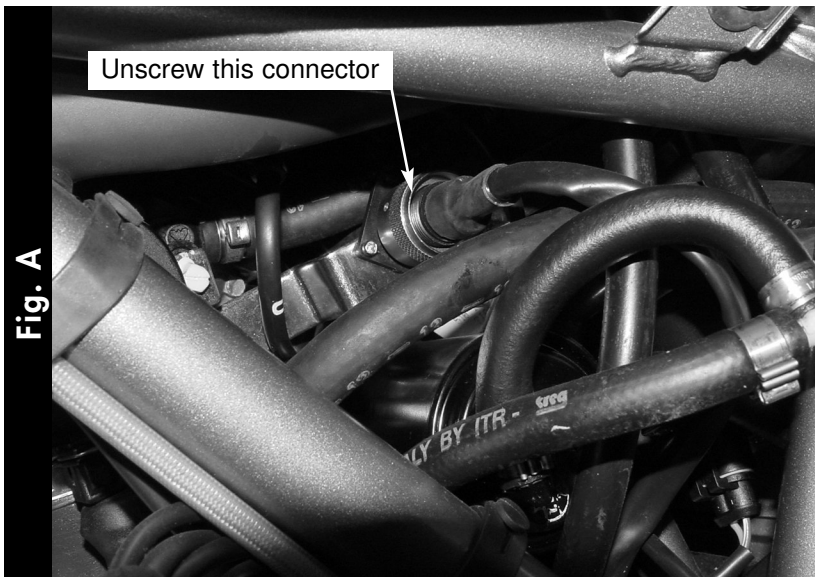


- 1 Lift the rear section.
- 2 Remove the left hand side fairing.
- 3 Locate the plug that resides in between the two throttle bodies (Fig. A). This plug has a round, silver retaining ring on the end of it.
- 4 Unscrew this connector by turning it counter-clockwise.

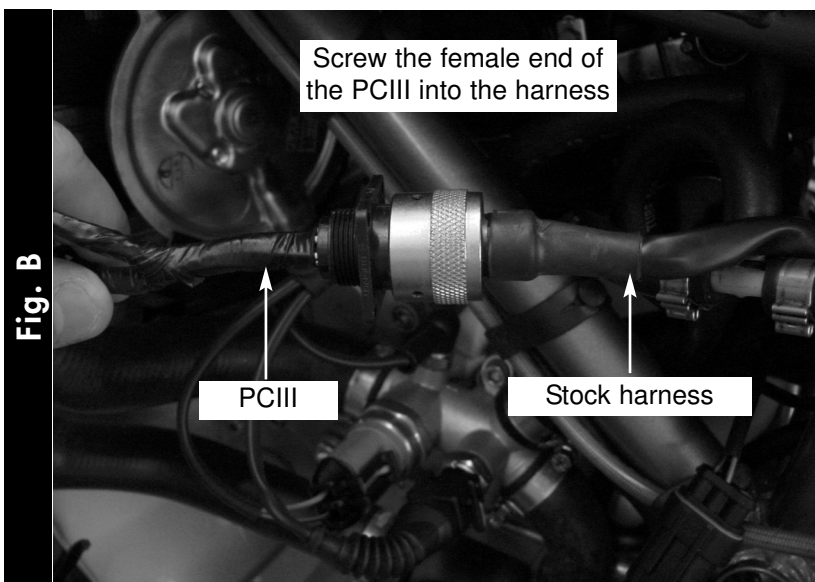


*Note: You may want to route the wires for the PCIII from the tail section to this area before plugging it in. This will make for a cleaner installation.*

- 5 Plug the female connector from the PCIII into the wiring harness (Fig. B).

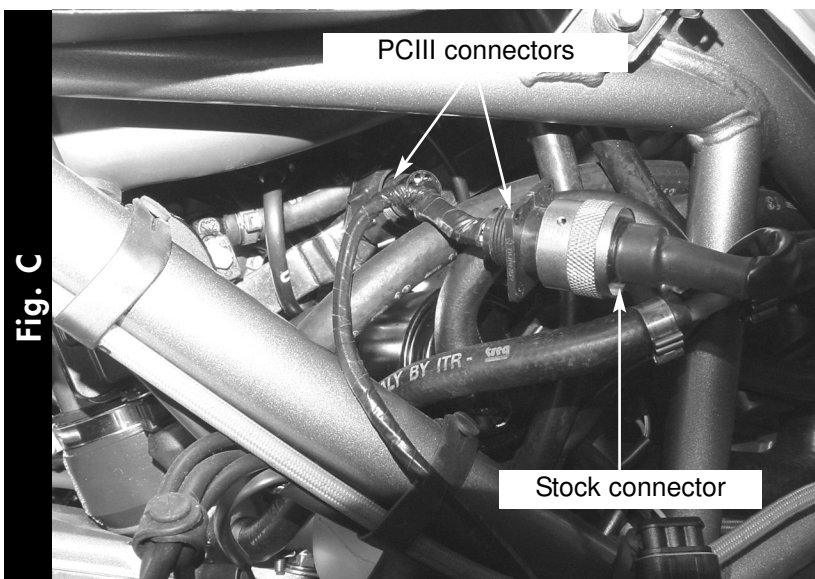

- 6) Plug the male connector from the PCIII into the stock female connector on the bracket (Fig. C).

Fig. D

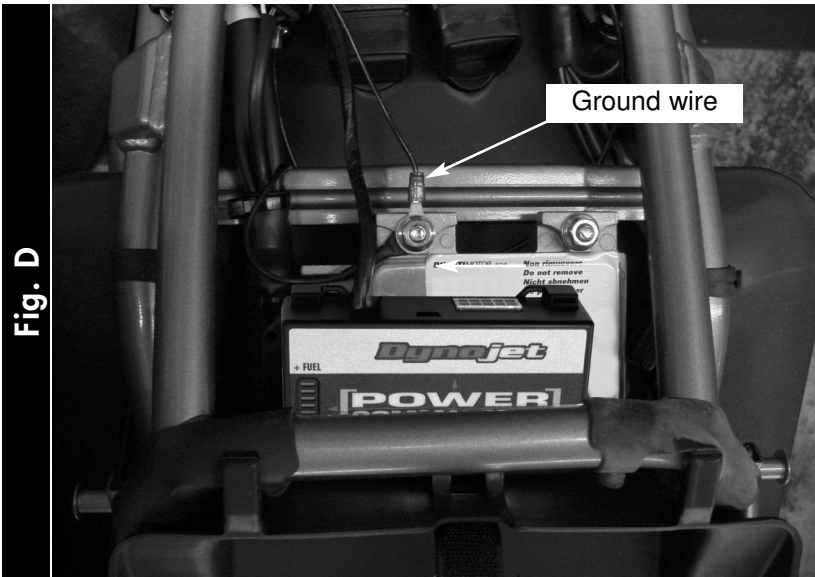

- 7 Attach the ground wire from the PCIII to front, left hand, mounting point of the ECU (Fig. D).
- 8 Attach the PCIII to the top of the ECU using the supplied velcro. (Fig. D). Make sure to clean both surfaces with the alcohol swab before attaching the velcro.
- 9 Make sure all wires are routed so they do not get damaged.
- 10 Reinstall the left hand side fairing.