

[POWER] [COMMANDER III]

CERTIFIED **USB**

2004 Yamaha Majesty 400 Installation Instructions

Parts List

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 1 Power Adapter
- 2 Power Commander Decals
- 2 Dynojet Decals
- 1 Velcro® Strip
- 1 Alcohol Swab

Button Adjustment Display



Faceplate Buttons

Expansion Port

USB Port




The ignition MUST be turned OFF before installation!

You can also download the Power Commander software and latest maps from our web site at:

www.powercommander.com

PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION

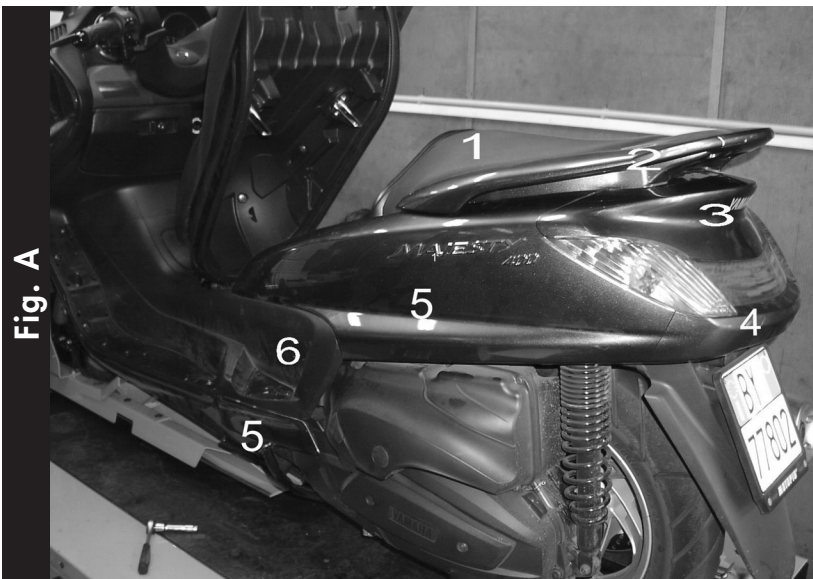

- 1 Remove passenger seat (Fig. A1).
- 2 Remove grabrail (Fig. A2).
- 3 Remove cover on top of rear light (Fig. A3).
- 4 Remove cover under rearlight (Fig. A4).
- 5 Remove top and bottom left-hand side cover (Fig. A5).
- 6 Bend open the black middle left hand side cover from the back side.



- 7 Look for grey connectors (Fig. B), disconnect them, and plug in the Power Commander connectors in line of the stock wiring harness. (Fig. C)
- 8 Route the PC harness through the trunk to the back of the scooter.
- 9 Attach the ground wire from the PC to the negative side of the battery.
- 10 Install the PC on top of the battery, using the supplied Velcro.

