

# [POWER COMMANDER V]

## FUEL AND IGNITION

**2008-2010 KTM RC8**

**2009-2010 KTM RC8R**

Installation Instructions



### PARTS LIST

- 1 Power Commander
- 1 USB Cable
- 1 Installation Guide
- 2 Power Commander Decals
- 2 Dynojet Decals
- 2 Velcro strips
- 1 Alcohol swab

**THE IGNITION MUST BE TURNED  
OFF BEFORE INSTALLATION!**


THE LATEST POWER COMMANDER  
SOFTWARE AND MAP FILES CAN BE  
DOWNLOADED FROM OUR WEB SITE AT:  
[www.powercommander.com](http://www.powercommander.com)

**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

**Dynojet**

2191 Mendenhall Drive North Las Vegas, NV 89081 (800) 992-4993 [www.powercommander.com](http://www.powercommander.com)

# POWER COMMANDER V INPUT ACCESSORY GUIDE

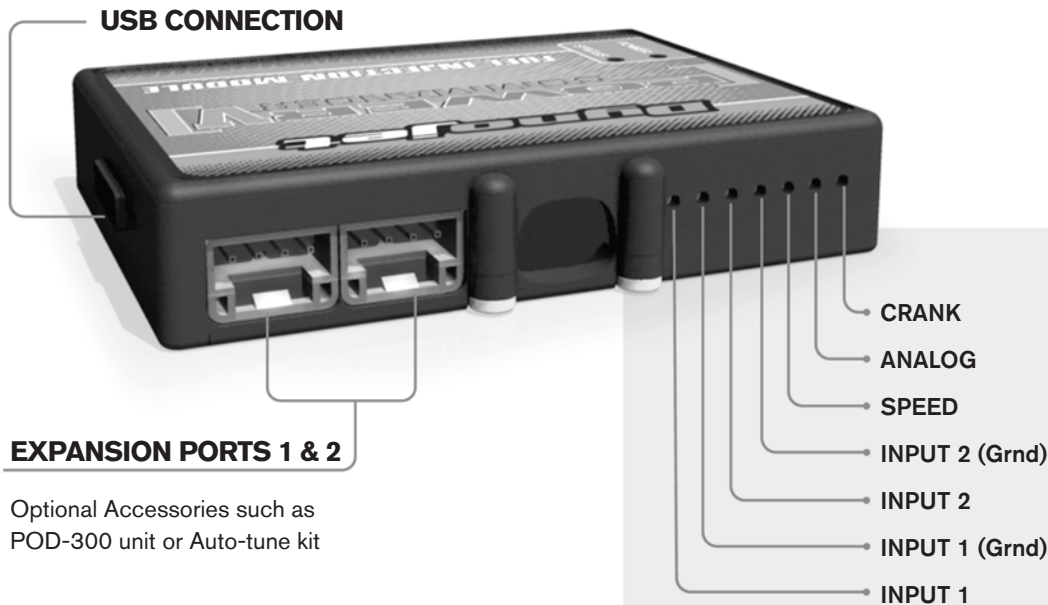

## Wire connections:

To input wires into the PCV first remove the rubber plug on the backside of the unit and loosen the screw for the corresponding input. Using a 22-24 gauge wire strip about 10mm from its end. Push the wire into the hole of the PCV until it stops and then tighten the screw. Make sure to reinstall the rubber plug.

NOTE: If you tin the wires with solder it will make inserting them easier.



## ACCESSORY INPUTS

### Map -

(Input 1 or 2) The PCV has the ability to hold 2 different base maps. You can switch on the fly between these two base maps when you hook up a switch to the MAP inputs. You can use any open/close type switch. The polarity of the wires is not important. When using the Autotune kit one position will hold a base map and the other position will let you activate the learning mode. When the switch is "CLOSED" Autotune will be activated. (Set to Switch Input #1 by default.)

### Shifter-

(Input 1 or 2) These inputs are for use with the Dynojet quickshifter. Insert the wires from the Dynojet quickshifter into the SHIFTER inputs. The polarity of the wires is not important. (Set to Switch Input #2 by default.)

### Speed-




If your application has a speed sensor then you can tap into the signal side of the sensor and run a wire into this input. This will allow you to calculate gear position in the Control Center Software. Once gear position is setup you can alter your map based on gear position and setup gear dependent kill times when using a quickshifter.

### Analog-

This input is for a 0-5v signal such as engine temp, boost, etc. Once this input is established you can alter your fuel curve based on this input in the control center software.

### Crank-

Do **NOT** connect anything to this port unless instructed to do so by Dynojet. It is used to transfer crank trigger data from one module to another.

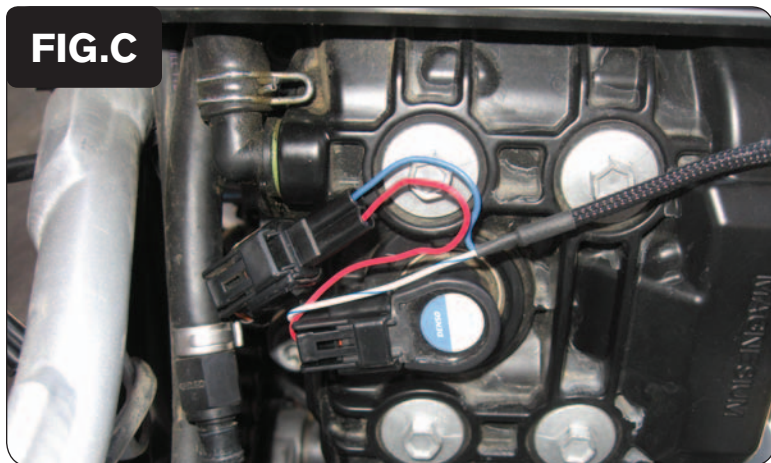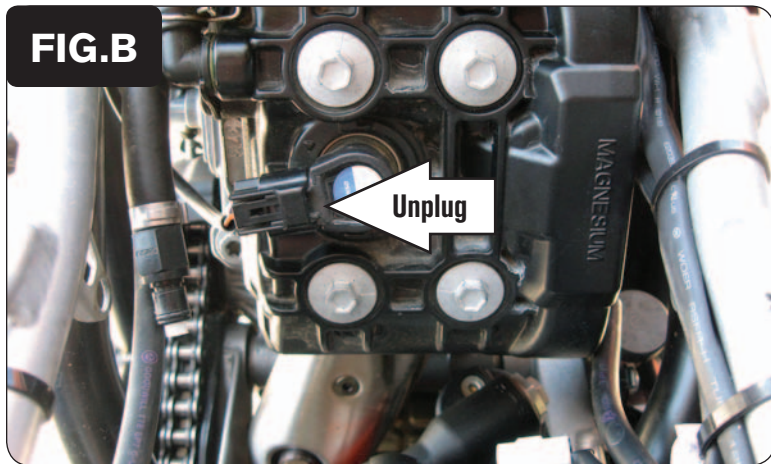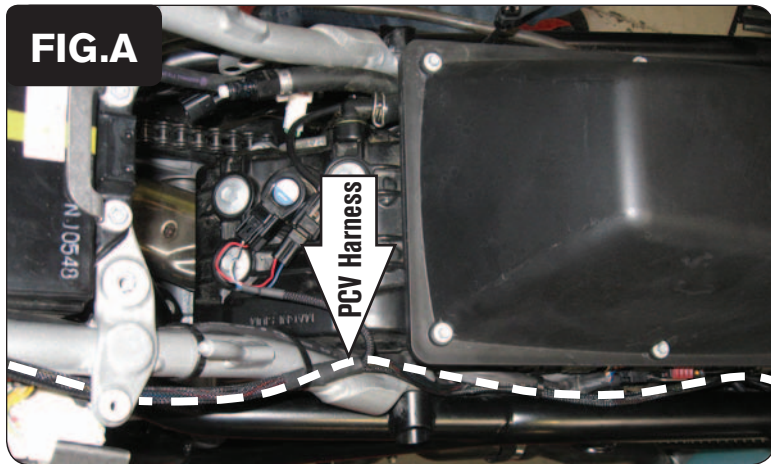

- 1 Remove the seat and both side fairings.
- 2 Remove the fuel tank.
- 3 Lay the PCV next to the battery and route the PCV harness along the frame on the right side up towards the front of the engine (Fig. A).
- 4 Locate the Rear Ignition Coil and unplug the stock wiring harness from the coil (Fig. B).
- 5 Plug the pair of PCV connectors with the BLUE colored wires in-line of the Rear Ignition Coil and the stock wiring harness (Fig. C).






- 6 Locate the sub connector from the throttle bodies on the right side of the motorcycle. Unplug this connector (Fig. D).

*This is a GREY 16-pin connector pair located between the frame and the airbox near the tip over sensor.*




- 7 Route the PCV harness to the inside of the frame (which may require you to move the MAP sensor.)
- 8 Plug the pair of 16-pin PCV wiring harness connectors in-line of the stock wiring harness (Fig. E).

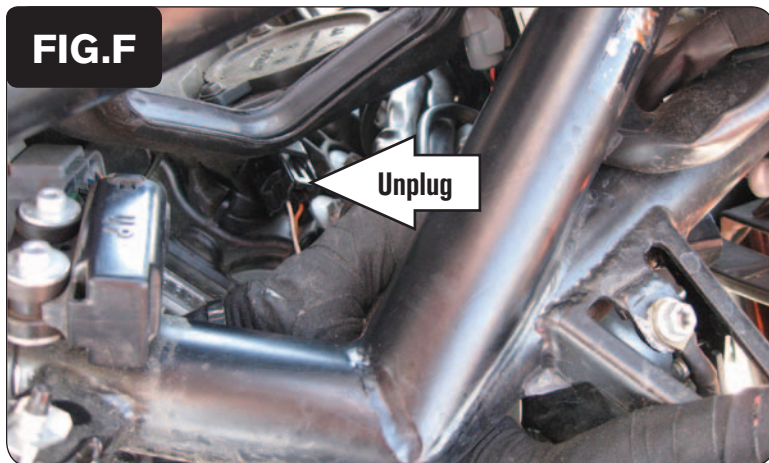

- 9 Locate the Front Ignition Coil and unplug the stock wiring harness from the coil (Fig. F).




- 10 Plug the pair of PCV connectors the GREEN colored wires in-line of the Front Ignition Coil and the stock wiring harness (Fig. G).

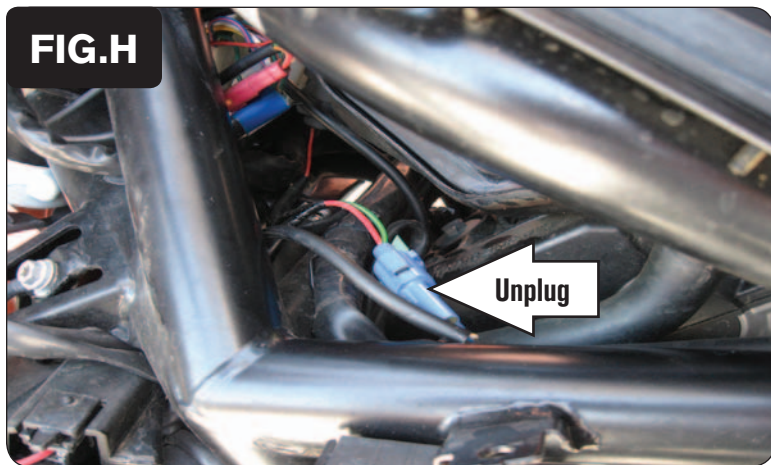


- 11 Locate the stock Crank Position Sensor connectors on the left side of the motorcycle. Unplug this connection (Fig. H).

*This is a BLUE 2-pin connector pair. On one side of the connector it has a RED wire and a GREEN wire.*

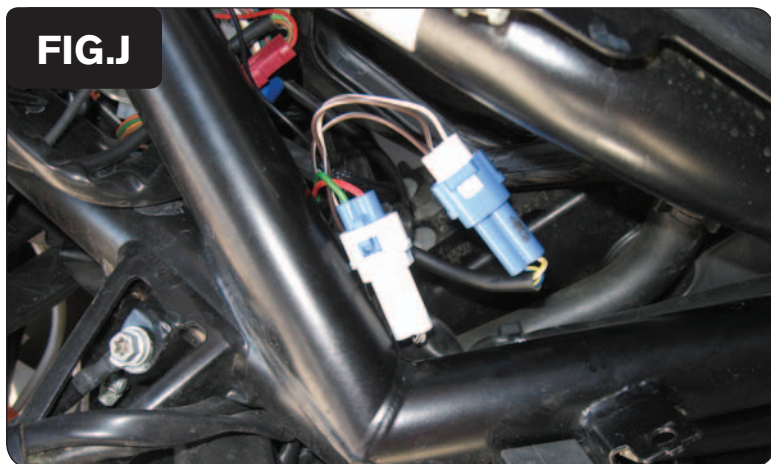

- 12 Route the pair of WHITE 2-pin PCV connectors over to the left side of the motorcycle and plug them in-line of the stock Crank Position Sensor connectors (Fig. J).
- 13 Feed the pair of connectors back over to the right side of the motorcycle.



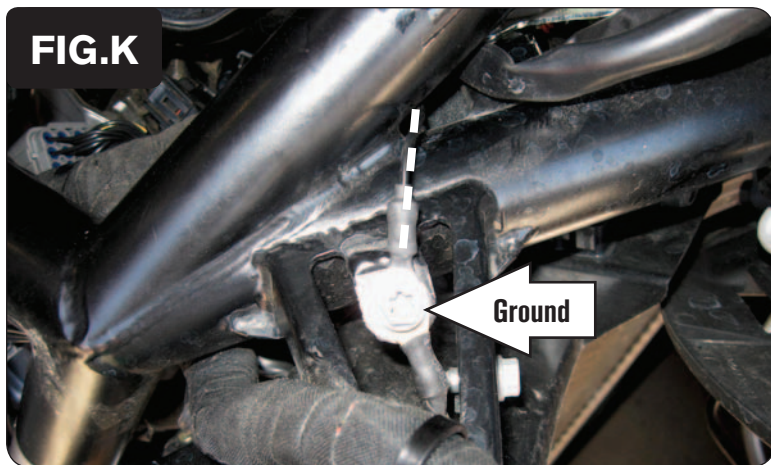

- 14 Attach the PCV ground wire with the small ring lug to the stock common ground location on the right side of the frame (Fig. K).



- 15 Install the PCV behind the battery, using the supplied Velcro (Fig. L).  
*Make sure to clean both surfaces with the supplied alcohol swab before attaching the Velcro.*
- 16 Reinstall the fuel tank, the bodywork, and the seat.