

# [POWER COMMANDER V]

## FUEL AND IGNITION

### 2019 Suzuki KingQuad 500

#### Installation Instructions



#### PARTS LIST

- 1 Power Commander
- 1 USB Cable
- 1 Installation Guide
- 2 Power Commander Decals
- 2 Dynojet Decals
- 1 Alcohol swab
- 2 Velcro strips
- 1 Positap

**THE IGNITION MUST BE TURNED  
OFF BEFORE INSTALLATION!**


THE LATEST POWER COMMANDER  
SOFTWARE AND MAP FILES CAN BE  
DOWNLOADED FROM OUR WEB SITE AT:  
[www.powercommander.com](http://www.powercommander.com)

**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

**Dynojet**

2191 Mendenhall Drive North Las Vegas, NV 89081 (800) 992-4993 [www.powercommander.com](http://www.powercommander.com)

# POWER COMMANDER V INPUT ACCESSORY GUIDE

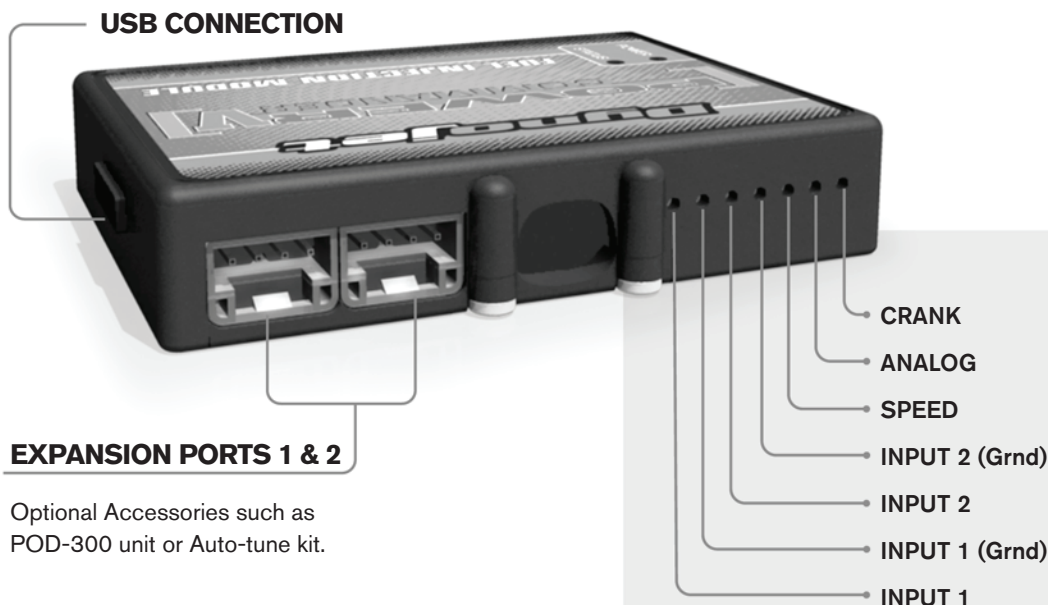


## EXPANSION PORTS 1 & 2

Optional Accessories such as  
POD-300 unit or Auto-tune kit.

## Wire connections:

To input wires into the PCV first remove the rubber plug on the backside of the unit and loosen the screw for the corresponding input. Using a 22-24 gauge wire strip about 10mm from its end. Push the wire into the hole of the PCV until it stops and then tighten the screw. Make sure to reinstall the rubber plug.

NOTE: If you tin the wires with solder it will make inserting them easier.

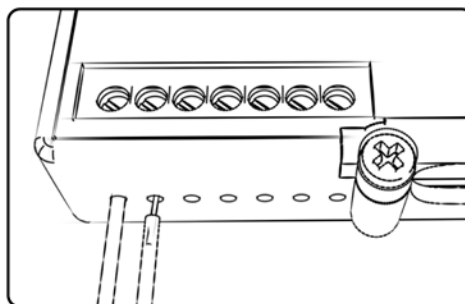

## ACCESSORY INPUTS

### Map -

(Input 1 or 2) The PCV has the ability to hold 2 different base maps. You can switch on the fly between these two base maps when you hook up a switch to the MAP inputs. You can use any open/close type switch. The polarity of the wires is not important. When using the Autotune kit one position will hold a base map and the other position will let you activate the learning mode. When the switch is "CLOSED" Autotune will be activated. (Set to Switch Input #1 by default.)

### Shifter-

(Input 1 or 2) These inputs are for use with the Dynojet quickshifter. Insert the wires from the Dynojet quickshifter into the SHIFTER inputs. The polarity of the wires is not important. (Set to Switch Input #2 by default.)

### Speed-


If your application has a speed sensor then you can tap into the signal side of the sensor and run a wire into this input. This will allow you to calculate gear position in the Control Center Software. Once gear position is setup you can alter your map based on gear position and setup gear dependent kill times when using a quickshifter.

### Analog-

This input is for a 0-5v signal such as engine temp, boost, etc. Once this input is established you can alter your fuel curve based on this input in the control center software.

### Crank-


Do **NOT** connect anything to this port unless instructed to do so by Dynojet. It is used to transfer crank trigger data from one module to another.

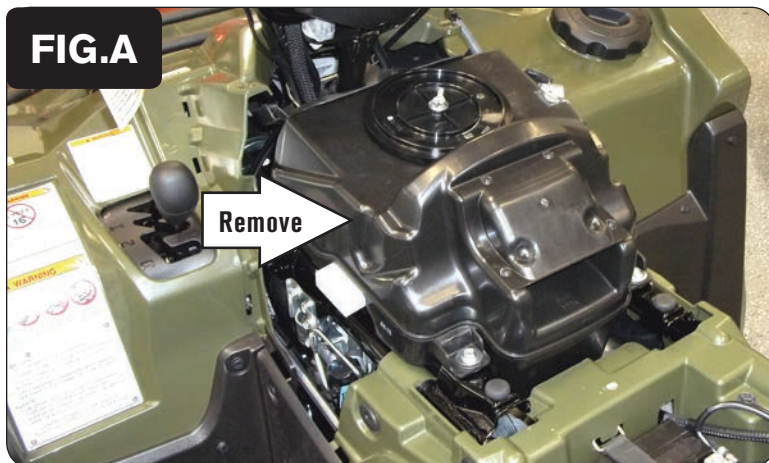

- 1 Remove the seat and the plastic panels around the airbox.
- 2 Remove the airbox (Fig. A).



- 3 Secure the PCV module to the top of the battery with the supplied Velcro.  
*Use the alcohol swab to clean surfaces before attaching the Velcro.*
- 4 Secure the PCV ground wire with the ring lug to the negative (-) terminal of the battery.
- 5 Route the PCV wiring harness into the engine compartment. (Fig. B).

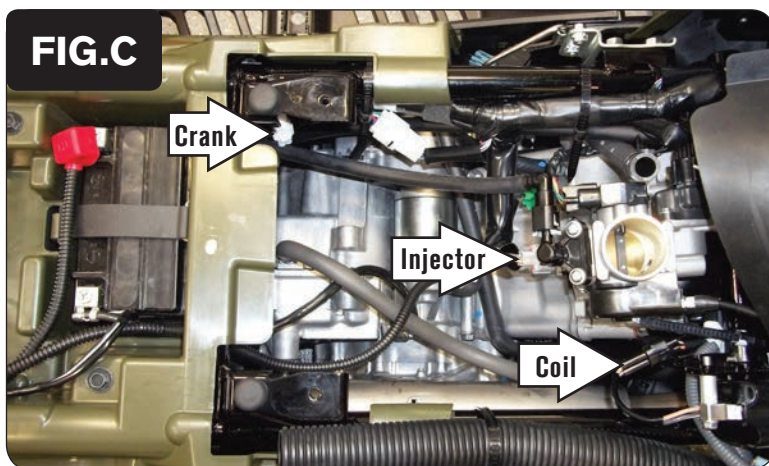


- 6 Unplug the stock Crank Position Sensor connectors.
- 7 Unplug the stock wiring harness from the Fuel Injector.
- 8 Unplug the stock Ignition Coil connectors (Fig. C).






- 9 Plug the pair of PCV connectors with BROWN colored wires in-line with the stock Crank Position Sensor connectors (Fig. D).

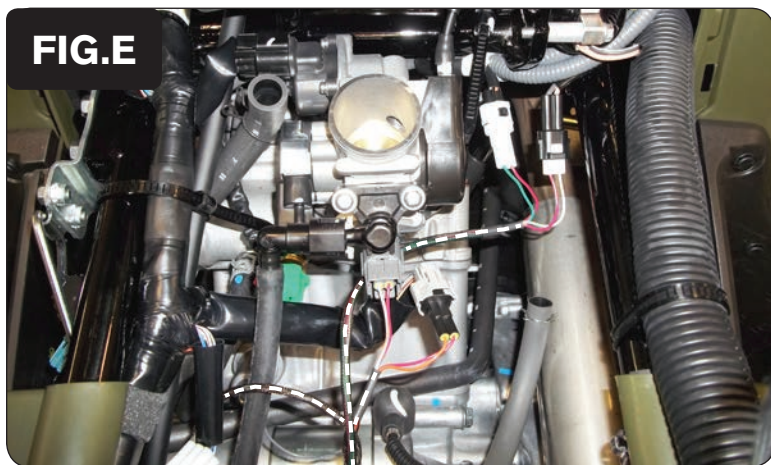

- 10 Plug the PCV wiring harness in-line with the Fuel Injector and the stock wiring harness.
- 11 Plug the PCV connectors with GREEN colored wires in-line with the stock Ignition Coil connectors (Fig. E).

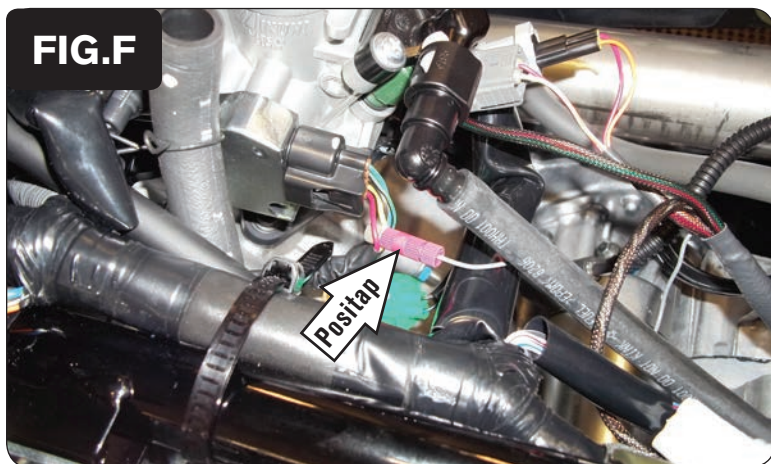

- 12 Use the supplied Posi-Tap to attach the PCV GREY wire to the stock YELLOW wire of the Throttle Position Sensor (Fig. F).
- 13 Reinstall the airbox, plastic covers, and the seat.

