

Thank you for purchasing this Dynojet kit. This kit has been developed for a motorcycle which is set to the parameters listed at the right in the "Stage" description. If your motorcycle does not meet any of these parameters please check with Dynojet before installation. For technical assistance contact your Dynojet distributor or call Dynojet U.S.A. (800)-992-4993



WARNING

**NO SMOKING!
NO OPEN FLAME!
WHILE INSTALLING
YOUR DYNOJET KIT**

2191 Mendenhall Dr. Suite 105
North Las Vegas, NV 89031
TEL: 702-399-1423
FAX: 702-399-1431
8am-5pm Pacific Time
Monday through Friday

Website Address
<http://www.dynojet.com>


The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein. Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.

9110.001

2002-2003 KTM 250 MXC & EXC

Stage 1

For mildly tuned machines using the stock airbox, with stock or stock replacement air filter. May also be used with a good aftermarket exhaust system

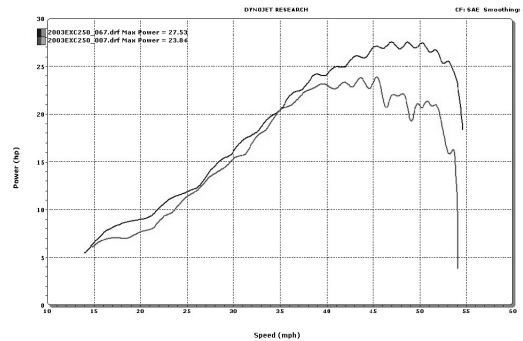

This graph shows a typical gain with a Dynojet jet kit.

Parts List

1	Main Jet	DJ122
1	Main Jet	DJ124
1	Main Jet	DJ126
1	Main Jet	DJ128
1	Main Jet	DJ130
1	Main Jet	DJ132
1	Main Jet	DJ134
1	Main Jet	DJ136
1	Main Jet	DJ138
1	Fuel Needle	DNO984
1	E-Clip	DE0001
1	Adjusting Washer	DW0001
2	Main Jet Adapters	DJA001

STAGE ONE INSTRUCTIONS

NOTE: This kit can be installed without completely removing the carburetor.

1. Remove the top of the carb. Remove the allen screw (Fig.A) and pull out the stock needle and spacers, noting order of assembly.
2. Install the Dynojet needle on groove #4 from the top. Install the small Dynojet washer above the e-clip.
3. Remove the nut from the bottom of the float bowl (Fig. B). Remove the stock main jet. Install the Dynojet Main Jet Adapter (DJA001). **NOTE:** Only one adapter is needed, the second one is provided as a spare. Install the Dynojet Main Jet provided into the Main Jet Adapter. If you are running the stock exhaust install the DJ128 for under 3000 ft. Install the DJ126 main jet from 3000-6000 ft. Install the DJ124 main jet if above 6000 ft. If you are running an aftermarket exhaust or slip-on with a high flow baffle, use the DJ132 main jet. Install the DJ130 main jet from 3000-6000 ft. Install the DJ128 main jet if above 6000 ft. Be sure that the jet you are changing is the main jet.
4. Locate the fuel mixture screw (Fig.B). Carefully turn the mixture screw clockwise until lightly seated, then back out 3 turns.




Fig. A

Remove this allen screw to access the needle

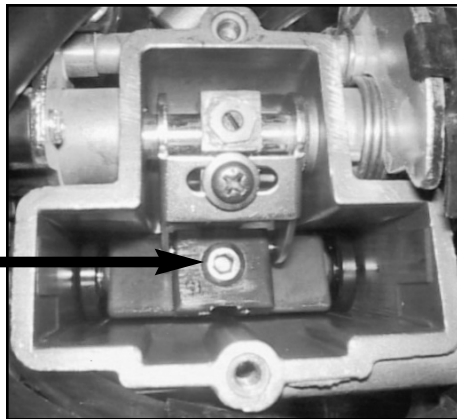


Fig. B

Fuel mixture screw

Remove this nut to access the main jet

